

Attorney Docket: 081776-306363

Client Reference: SLB-3001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT APPLICATION of KARL JOHNSON ET AL.

Application No.: 10/697,554

Confirmation No: 8401

Filed: October 31, 2003

Group Art Unit: 3724

Examiner: Phong H.Nguyen

Title: METAL DEMOLITION SHEARS WITH INDEXABLE, INTEGRATED WEAR
PLATE/PIERCING TIP

REQUEST FOR REPUBLICATION under 37 C.F.R. 1.221(a)

Commissioner for Patents
P. O. Box 1450
Alexandria, VA 22313-1450

Sir:


Pursuant to 37 CFR 1.221(a), Applicants hereby request republication of the above-identified pending patent application. Included with this request are:

- (1) a copy of the application to be republished;
- (2) the \$300.00 publication fee under 37 C.F.R. 1.18(d); and
- (3) the \$130.00 processing fee under 37 C.F.R. 1.17(i).

The Commissioner is authorized to charge counsel's Deposit Account 033975 any additional required fees as needed to ensure consideration of the disclosed information.

Respectfully submitted,

PILLSBURY WINTHROP SHAW PITTMAN LLP


Benjamin L. Kiersz
Reg. No. 51,875
Tel. No. 703.770.7714
Fax No. 703.770.7901

July 14, 2008

P.O. Box 10500
McLean, VA 22102
Telephone: (703) 770-7900
Customer Number: 00909

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number.	081776-306363
		Application Number.	10/697554
Title of Invention.	METAL DEMOLITION SHEARS WITH INDEXABLE, INTERGRATED WEAR PLATE/PIERCING TIP		
<p>The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76.</p> <p>This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.</p>			

Secrecy Order 37 CFR 5.2


- ☐ Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Applicant Information:



Applicant 1					
Applicant Authority		<input checked="" type="radio"/> Inventor		<input type="radio"/> Legal Representative under 35 U.S.C. 117	
				<input type="radio"/> Party of Interest under 35 U.S.C. 118	
Prefix	Given Name	Middle Name	Family Name	Suffix	
	Karl		JOHNSON		
Residence Information (Select One) <input checked="" type="radio"/> US Residency <input type="radio"/> Non US Residency <input type="radio"/> Active US Military Service					
City	Duluth	State/Province	MN	Country of Residence i	US
Citizenship under 37 CFR 1.41(b) i		US			
Mailing Address of Applicant:					
Address 1		4880 Arnold Road			
Address 2					
City	Duluth	State/Province	MN		
Postal Code	55803	Country i			
Applicant 2					
Applicant Authority		<input checked="" type="radio"/> Inventor		<input type="radio"/> Legal Representative under 35 U.S.C. 117	
				<input type="radio"/> Party of Interest under 35 U.S.C. 118	
Prefix	Given Name	Middle Name	Family Name	Suffix	
	Louis		MAGGIO		
Residence Information (Select One) <input checked="" type="radio"/> US Residency <input type="radio"/> Non US Residency <input type="radio"/> Active US Military Service					
City	Brewster	State/Province	NY	Country of Residence i	US
Citizenship under 37 CFR 1.41(b) i		US			
Mailing Address of Applicant:					
Address 1		287 Turk-Hill-Road			
Address 2					
City	Brewster	State/Province	NY		
Postal Code	10509	Country i	US		
Applicant 3					
Applicant Authority		<input checked="" type="radio"/> Inventor		<input type="radio"/> Legal Representative under 35 U.S.C. 117	
				<input type="radio"/> Party of Interest under 35 U.S.C. 118	
Prefix	Given Name	Middle Name	Family Name	Suffix	
	Clayton		SEDERBERG		
Residence Information (Select One) <input checked="" type="radio"/> US Residency <input type="radio"/> Non US Residency <input type="radio"/> Active US Military Service					
City	Duluth	State/Province	MN	Country of Residence i	US

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	081776-306363
		Application Number	10/697554
Title of Invention	METAL DEMOLITION SHEARS WITH INDEXABLE, INTERGRATED WEAR PLATE/PIERCING TIP		

Citizenship under 37 CFR 1.41(b) i		US	
Mailing Address of Applicant:			
Address 1	1026 Valley Drive		
Address 2			
City	Duluth	State/Province	MN
Postal Code	55804	Country	US
All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button. 			

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below. For further information see 37 CFR 1.33(a).			
<input type="checkbox"/> An Address is being provided for the correspondence information of this application.			
Customer Number	00909		
Email Address	jack.barufka@pillsburylaw.com		

Application Information:

Title of the Invention	METAL DEMOLITION SHEARS WITH INDEXABLE, INTERGRATED WEAR PLATE/PIERCING TIP		
Attorney Docket Number	081776-306363	Small Entity Status Claimed <input type="checkbox"/>	
Application Type	Nonprovisional		
Subject Matter	Utility		
Suggested Class (if any)		Sub Class (if any)	
Suggested Technology Center (if any)			
Total Number of Drawing Sheets (if any)	12	Suggested Figure for Publication (if any)	

Publication Information:

<input type="checkbox"/> Request Early Publication (Fee required at time of Request 37 CFR 1.219)
<input type="checkbox"/> Request Not to Publish. I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.


Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Enter either Customer Number or complete the Representative Name section below. If both sections are completed the Customer Number will be used for the Representative Information during processing.			
Please Select One:	<input checked="" type="radio"/> Customer Number	<input type="radio"/> US Patent Practitioner	<input type="radio"/> Limited Recognition (37 CFR 11.9)

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	081776-306363
		Application Number	10/697554
Title of Invention	METAL DEMOLITION SHEARS WITH INDEXABLE, INTERGRATED WEAR PLATE/PIERCING TIP		
Customer Number	00909		


Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78(a)(2) or CFR 1.78(a)(4), and need not otherwise be made part of the specification.

Prior Application Status			
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the Add button.			

Foreign Priority Information:

This section allows for the applicant to claim benefit of foreign priority and to identify any prior foreign application for which priority is not claimed. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(a).

			
Application Number	Country ⁱ	Parent Filing Date (YYYY-MM-DD)	Priority Claimed
			<input type="radio"/> Yes <input type="radio"/> No
Additional Foreign Priority Data may be generated within this form by selecting the Add button.			

Assignee Information:

Providing this information in the application data sheet does not substitute for compliance with any requirement of part 3 of Title 37 of the CFR to have an assignment recorded in the Office.

Assignee 1			
If the Assignee is an Organization check here. <input checked="" type="checkbox"/>			
Organization Name	THE STANLEY WORKS		
Mailing Address Information:			
Address 1	1000 Stanley Drive		
Address 2			
City	New Britain	State/Province	CT
Country ⁱ	US	Postal Code	06053
Phone Number		Fax Number	
Email Address			
Additional Assignee Data may be generated within this form by selecting the Add button.			

Signature:

A signature of the applicant or representative is required in accordance with 37 CFR 1.33 and 10.18. Please see 37 CFR 1.4(d) for the form of the signature.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number		081776-306363	
		Application Number		10/697554	
Title of Invention		METAL DEMOLITION SHEARS WITH INDEXABLE, INTERGRATED WEAR PLATE/PIERCING TIP			
Signature		<i>Benjamin L. Kiersz</i>		Date (YYYY-MM-DD)	
				2008-07-14	
First Name	Benjamin	Last Name	Kiersz	Registration Number	51875

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

METAL DEMOLITION SHEARS WITH INDEXABLE, INTEGRATED
WEAR PLATE/PIERCING TIP

Field of the Invention

[0001] The invention relates to metal demolition shears. More particularly, the invention relates to the cutting/piercing elements thereof.

Background of the Invention

[0002] A conventional configuration for a metal demolition shears 900 as known in the prior art is illustrated in FIGURES 1 and 2. The shears 900 are configured to be attached to the boom structure of, for example, excavating or earth-moving excavation equipment such as that made by Caterpillar, Komatsu, Hitachi, Kobelco, etc. The shears 900 include a lower, fixed or stationary jaw 902 and an upper, movable jaw 904. The upper, movable jaw 904 is pivotally mounted by means of pivot structure 906, which includes, for example, a main shaft, tie rod, rotation bearings and thrust bearing, end caps, and fasteners so as to pivot relative to the lower fixed or stationary jaw 902, as illustrated by double-headed arrow 908. Piston member 910 articulates (drives) the upper, movable jaw 904 for such pivoting movement. The stationary jaw 902 is mounted into a stick weldment structure 912 that supports the piston member 910 and the pivoting upper jaw 904, and the stick weldment structure 912 is mated to the boom of the machinery by means of a fixed mounting bracket 913 (FIGURE 1) or a rotational mounting adapter 914 (shown in FIGURE 2) and rotational drive system (not shown in FIGURE 1).

[0003] The lower, fixed jaw 902 includes a fixed blade member 916 and a guide member 920. The guide blade member 920 is laterally spaced

from the fixed blade member 916 and extends generally parallel to the fixed blade member 916. A cross-member 922 extends between and is connected to the endmost portions of the fixed blade member 916 and the guide member 920. Together, the fixed blade member 916, guide member 920, and cross-member 922 define a slot 924 into which the upper, movable jaw 904 moves during operation of the shears 900.

[0004] The shears 900 includes a number of hardened metal inserts that provide various cutting, piercing, or load-supporting edges and surfaces. In particular, the lower, fixed jaw 902 has a pair of hardened steel blade insert members 926, and the upper, movable jaw 904 has a pair of hardened steel insert members 928. The blade insert members 926 and 928 fit within correspondingly configured recesses or seating surfaces formed in the lower and upper jaws 902 and 904, respectively, and are secured therein, e.g., by bolts. As the shears 900 is operated and the upper, movable jaw 904 is pivoted closed relative to the lower, fixed jaw 902, the blade insert members 928 in the upper, movable jaw 904 move past the blade insert members 926 in the lower, fixed jaw 902, and the cutting edges 930 and 932 of the lower and upper blade insert members 926, 928, respectively, co-act to shear or cut a workpiece such as I-beams, pipes, scrap sheet metal, etc. held between the jaws of the shears. As disclosed, for example, in U.S. Patent No. 5,992,023, the blade insert members may be indexable, meaning that they can be reoriented and repositioned to present new or fresh cutting edges as the cutting edges 930, 932 become worn.

[0005] As the upper, movable jaw 904 pivots downward to shear a workpiece between the steel blade insert members 926 and 928, the workpiece tends to force the upper, movable jaw 904 laterally away from the fixed blade member 916 of the lower, fixed jaw 902. The guide member 920 limits or

constrains such lateral deflection of the upper, movable jaw 904. As a result, as the movable jaw 904 pivots downward into the slot 924, the lateral surface 934 of the nose portion 936 of the movable jaw 904 bears against inner-facing surface 938 of the guide member 920. Therefore, a hardened steel wear plate 940 is customarily secured to the lateral surface 934 of the nose portion 936, and a hardened steel wear insert 942 is secured to the inner-facing surface 938 of the guide member 920.

[0006] In addition to the blade insert members 926, 928, wear plate 940, and wear insert 942, a shears 900 conventionally has a hardened steel piercing tip 944 that is secured, e.g., by welding to a lower surface of the nose portion 936 at a forwardmost portion thereof. A hardened steel cross blade insert 946 is secured within a correspondingly shaped recess in the cross member 922 and cooperates with and/or provides a cutting surface against which the piercing tip 944 engages when the shears 900 is being used to pierce holes through larger, generally flattened pieces of scrap metal.

[0007] Customarily, the various cutting, supporting, piercing, and/or wear elements described above (the blade insert members 926, 928, the wear plate 940, the wear insert 942, the piercing tip 944, and the cross blade insert 946) are provided as individual, separate components.

BRIEF SUMMARY OF THE INVENTION

[0008] The present invention features an indexable wear plate/piercing tip insert that is configured to be removably and repositionably attached to the front, nose portion of the upper, movable jaw of a metal demolition shears. The insert functions as both a wear plate and a piercing tip and is indexable in that a non-worn or less worn portion of the wear surface of the wear plate portion of the insert and non-worn shearing and piercing edges of the piercing tip portion of the insert can be presented simultaneously simply by rotating the insert 180° and reattaching it to the nose portion of the upper, movable jaw of a metal demolition shears. This configuration simplifies maintenance of the shears and reduces the number of different parts that need to be kept in inventory, thus reducing operational costs. Additionally, because the wear plate/piercing tip insert is configured to be removable and repositionable, it is not welded onto the upper jaw or weldment. Therefore, an additional welding step is eliminated as a result of the bolt-on configuration of the wear plate/piercing tip of the invention.

[0009] Thus, according to a first aspect, the invention features an indexable wear plate/piercing tip insert that is configured to be attached at a front, nose portion of a correspondingly configured movable jaw of a metal demolition shears. The wear plate/piercing tip insert has a body portion, a surface of which provides a wear surface, and at least a pair of laterally extending or protruding tip portions that provide multiple piercing tips for the movable jaw. The geometric configuration of the wear plate/piercing tip insert is essentially the same in a first position and a second position, the second position being a position in which the wear plate/piercing tip insert is rotated about a pivot axis passing centrally through the wear plate/piercing tip insert. As a result, a non-worn or less worn portion of the wear surface of the insert

and non-worn or less worn shearing and piercing edges of the insert can be presented simultaneously for the metal demolition shear by rotating the wear plate/piercing tip insert about its pivot axis, from the first position to the second position, and reseating the wear plate/piercing tip insert on the movable jaw.

[0010] According to one embodiment of the wear plate/piercing tip insert, the second position is a position in which the wear plate/piercing tip insert is rotated by 180° about its pivot axis. Additionally, the wear plate/piercing tip insert may have shearing edges on each tip portion that are coplanar with and that form an edge of the wear surface. The wear plate/piercing tip may also have at least one support boss that is located between the metal tip portions and that extends laterally from a central region of the wear plate/piercing tip to provide bearing support to help prevent the wear plate/piercing tip insert from being sheared off of the movable jaw during cutting and retracting operation of the shears on which the wear plate/piercing insert is mounted.

[0011] According to a second aspect, the invention features a metal demolition shears having an indexable wear plate/piercing tip insert, generally as per the first aspect of the invention. The shears has a fixed jaw and a movable jaw, with the indexable wear plate/piercing tip insert being seated on the movable jaw at a forward, nose portion of the movable jaw.

[0012] According to an embodiment of the invention, the shears has a fixed jaw including a fixed blade member with a first cutting/shearing edge extending along it and a guide member spaced from and extending in generally parallel relation to the fixed blade member. The shears also has a movable jaw that pivots relative to the fixed jaw, with a second

cutting/shearing edge extending along the movable jaw. An indexable wear plate/piercing tip insert is attached at a front, nose portion of the movable jaw.

[0013] The front, nose portion of the movable jaw has a pocket or cavity into which the tip portions of the wear plate/piercing tip insert each fit, with one of the tip portions being fitted in the pocket or cavity when positioned in a non-operative position. The pocket or cavity has contours that match surface contours of the tip portions. Additionally, the front, nose portion of the movable jaw has a notch formed in an underside thereof, with the notch having surface contours that match surface contours of each of the tip portions. The tip portion that is positioned in an operative position engages with the notch.

[0014] The second cutting/shearing edge may be provided by at least one blade insert member, with the blade insert member extending all the way to a forwardmost portion of the front, nose portion of the movable jaw. An inner-facing surface of one of the tip portions that is in an operative position may engage with an inner-facing surface of the blade insert, such that a forward portion of the blade insert and a forward, lower portion of the tip portion in the operative position together define a piercing tip portion of the movable jaw.

[0015] According to a third aspect, the invention features a jaw member for use in a metal demolition shears (for example, but not necessarily, the upper, movable jaw member). The jaw member has an indexable wear plate/piercing tip insert, generally as per the first aspect of the invention.

[0016] According to a fourth aspect, the invention features a jaw member for use in a metal demolition shears (for example, but not necessarily, the upper, movable jaw member). The jaw member is configured to receive

an indexable wear plate/piercing tip insert, generally as per the first aspect of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] These and other aspects and features of the invention will be described in greater detail below in connection with the drawings, in which:

[0018] FIGURES 1 and 2 are perspective views, from different angles, of a metal demolition shears according to the prior art;

[0019] FIGURES 3 and 4 are perspective views, from different angles, showing a metal demolition shears according to the invention;

[0020] FIGURE 5 is an exploded, perspective view showing the upper, movable jaw of a metal demolition shears according to the invention, as illustrated in FIGURES 3 and 4;

[0021] FIGURE 6 is a perspective view showing a portion of the upper, movable jaw illustrated in FIGURES 3-5;

[0022] FIGURE 7 is a perspective view illustrating an indexable wear plate/piercing tip according to the invention;

[0023] FIGURES 8a and 8b and perspective views from opposite sides of an alternate embodiment of an indexable wear plate/piercing tip according to the invention;

[0024] FIGURE 9 is a perspective view showing another alternate embodiment of an indexable wear plate/piercing tip according to the invention;

[0025] FIGURE 10 is an exploded, perspective view showing an alternate embodiment of the upper, movable jaw of a metal demolition shears

according to the invention, employing the indexable wear plate/piercing tip illustrated in FIGURE 9;

[0026] FIGURES 11 and 12 are perspective views from opposite sides showing the upper, movable jaw of a metal demolition shears illustrated in FIGURE 10, as assembled; and

[0027] FIGURE 13 is an exploded, perspective view showing another alternate embodiment of the upper, movable jaw of a metal demolition shears according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0028] A shears 100 according to the invention is illustrated in FIGURES 3 and 4, with an indexable wear plate/piercing tip insert 150 according to the invention being illustrated in greater detail in FIGURES 5-7. Like the prior art shears 900 illustrated in FIGURES 1 and 2, the shears 100 includes a lower, fixed jaw 102 and an upper, movable jaw 104 that is mounted by pivot structure 106 so as to be able to pivot relative to the lower, fixed jaw 102. A piston member 110 is pivotally attached to a piston connection point 111 and extends and retracts to drive the upper, movable jaw 104 to open and close the shears 100. The lower and upper jaws 102, 104, pivot structure 106, and piston member 110 are all mounted within or supported by a stick weldment structure 112, which is mounted by means of a rotational fitting or adapter (not shown) to the boom or dipstick structure of an excavator or other heavy-duty equipment.

[0029] The lower, fixed jaw 102 includes a fixed blade member 116 and a guide member 120 that is laterally spaced from and extends generally parallel to the fixed blade member 116. A cross member 122 is attached (e.g.,

welded) to the endmost portions of the blade member 116 and guide member 120, with a hardened steel cross member insert 146 secured within a correspondingly shaped recess on the inner-facing side of the cross member 122. Together, the fixed blade member 116, guide member 120, and cross member 122 form or define a slot 124 into which the upper, movable jaw 104 moves as it pivots to close the shears 100 during shearing operation of the shears 100.

[0030] A pair of indexable hardened steel blade insert members 126 are removably attached (e.g., by bolts) to the fixed blade member 116, and a pair of indexable hardened steel blade insert members 128 are removably attached (e.g., by bolts) to the upper, movable jaw 104. The blade insert members 126, 128 provide cutting edges 130, 132, respectively. To this extent, the construction of the shears 100 according to the invention is generally the same as that of the shears 900 explained above as representative of the prior art.

[0031] As further illustrated in FIGURES 3 and 4, and as illustrated in greater detail in FIGURES 5-7, an integral, indexable, wear plate/piercing tip insert 150 is removably secured to the forward, nose portion 136 of the upper, movable jaw 104 by means, for example, of cap screws or plow bolts 152. The wear plate/piercing tip insert 150 is preferably made from hardened, wear-resistant tool steel and has a central region 154 and ends 156. A tip portion 158 protrudes laterally from each end 156 of the wear plate/piercing tip insert 150, with the tip portions 158 both protruding toward the same side 160 of the wear plate/piercing tip insert 150. The opposite side 162 of the wear plate/piercing tip insert 150, on the other hand, has a generally planar surface 164. As described in greater detail below, the planar surface 164 provides a wear surface for the wear plate/piercing tip insert 150.

[0032] In addition to the tip portions 158, a central, circular boss 166 (or similar dowel-type insert) also extends laterally from the central region of the wear plate/piercing tip insert 150, toward the side 160 of the wear plate/piercing tip insert 150. The boss 166 (or dowel) seats in a corresponding bore or depression 182 (described further below) in the movable, upper jaw 104 to provide support and bearing resistance against the forces to which the wear plate/piercing tip 150 is subjected during both cutting and retraction movement of the upper, movable jaw 104, as well as to transfer those loads to the main, structural body of the upper jaw 104. Depending on the size of the loads to which the wear plate/piercing tip will be subjected, it may be desirable to provide two or more such bosses 166' on a wear plate/piercing tip insert 150', as illustrated in FIGURES 8a and 8b.

[0033] The wear plate/piercing tip insert 150 is "pivotally symmetric." In other words, the geometric configuration of the wear plate/piercing tip insert 150 is essentially the same when the wear plate/piercing tip insert 150 is rotated by 180° around pivot axis 168. Pivot axis 168 passes centrally through the wear plate/piercing tip insert 150, e.g., through the center of the circular boss 166 when just one is provided or with the bosses arranged symmetrically with respect to the pivot axis 168 when multiple bosses are provided, and pivot axis 168 extends normal to the planar surface 164. In particular, the profile of the wear plate/piercing tip insert 150 as seen looking along the pivot axis 168 in the direction of the arrow in FIGURE 7, including the contours of and the extent to which the tip portions 158 protrude toward the side 160, will be essentially the same when the wear plate/piercing tip insert 150 is rotated by 180° about the pivot axis 168. By "essentially the same," it is meant that deviations such as small bumps, ridges, cavities, differences in thickness, etc., that may be present but that do not prevent the wear plate/piercing tip insert 150 from being secured to the nose portion 136 in multiple orientations are

deemed not to destroy the “pivotal symmetry” of the wear plate/piercing tip insert 150.

[0034] Like the boss 166 (or bosses or dowel(s)), the tip portions 158 provide bearing support for the wear plate/piercing tip insert 150 during cutting and retraction operation of the movable jaw 104. Therefore, the contours of the tip portions 158 are preferably configured to optimize load transfer into the structural sections of the upper, movable jaw 104.

[0035] As illustrated in FIGURE 5, the nose portion 136 of the upper, movable jaw 104 has a surface 170 that is located on the side of the movable jaw 104 opposite to the side on which the blade insert members 128 are mounted, and that surface 170 is recessed slightly relative to surface 172 of the upper, movable jaw 104. The surface 170 is recessed by an amount that is the same as the thickness t_c (FIGURE 7) of the central region 154 of the wear plate/piercing tip insert 150.

[0036] The nose portion 136 also has a pocket or cavity 174 formed near an upper edge 176 thereof. The pocket or cavity 174 extends laterally, from the surface 170 toward the opposite side of the upper, movable jaw 104 to which the blade insert members 128 are attached, by an amount that is equal to the thickness t_w (FIGURE 7) of the tip portions 158 of the wear plate/piercing tip insert 150 (the thickness t_w being equal to the thickness t_c of the central region of the wear plate/piercing tip insert 150 and the amount by which the tip portions 158 protrude laterally relative to the central region 154). The contours of the pocket or cavity 174 match the contours of the surfaces 175 of the laterally extending tip portions 158.

[0037] In addition to the pocket or cavity 174, a cut-out or notch 178 is formed in an underside 180 of the nose portion 136 of the upper, movable jaw

104. The cut-out or notch 178 may extend laterally across the entire width of the nose portion 136. As is the case for the pocket or cavity 174, the contours of the cut-out or notch 178 match the contours of the surfaces 175 of the tip portions 158 of the wear plate/piercing tip insert 150, although only to the extent the surfaces 175 of the tip portions 158 will engage the surfaces of the notch 178 when the wear plate/piercing tip insert 150 is mounted to the nose portion 136 of the movable jaw member 104. In other words, the contours of the notch 178 will be the same as just a portion of the contours of the pocket or cavity 174.

[0038] A circular depression or bore 182 extends laterally from the surface 170 toward the opposite side of the nose portions 136, to which the blade insert members 128 are attached. The contours of the circular depression 182 match the contours of the central, circular boss 166, and the circular depression 182 extends laterally by an amount that is equal to the height of the central, circular boss 166, i.e., by an amount that is the same as the distance to which the central, circular boss 166 protrudes relative to the central region 154 of the wear plate/piercing tip insert 150. With this configuration, the wear plate/piercing tip insert 150 can be seated securely onto the nose portion 136, with the surface 155 of the central region 154 seating firmly against seating surface 170, one of the tip portions 158 fitting firmly and closely within pocket or cavity 174, a portion of the surface 175 of the other tip portion 158 engaging and mating with the surface of cut-out or notch 178, and the central, circular boss 166 extending into and mating with the circular depression 182. Of course, if multiple bosses (or dowels) are provided, a corresponding number of depressions or bores 182 will also be provided, in a corresponding configuration or arrangement.

[0039] The tip portions 158 of the wear plate/piercing tip insert 150 each have a pair of side surfaces 184 and 186 that are exposed when a given tip portion 158 is in the lower, operative position. The front-facing side surface 184 of the tip portion 158 that is in the lower, operative position is identified in FIGURE 6, and the bottom-facing side surface 186 (bottom-facing when the tip portion is in the operative position) is identified in FIGURE 6 for the tip portion 158 that is in the upper, non-operative position. The front-facing side surfaces and bottom-facing side surfaces intersect each other along piercing edges 188. Additionally, the bottom-facing side surfaces 186 intersect the planar surface 164 along shearing edges 190.

[0040] In the illustrated embodiment of a shears 100 according to the invention, one of the hardened steel blade insert members 128 extends forwardly all the way to the front of the nose portion 136, as illustrated in FIGURE 6. In that case, the forward-facing side surfaces 184 are preferably configured to be co-planar with the forward-facing end surfaces 129 of the blade insert members 128 when both the wear plate/piercing tip insert 150 and blade insert members 128 are installed in their respective operative positions on the upper, movable jaw 104. Furthermore, the piercing edges 188 are preferably co-linear with the bottom-facing piercing edge 131 of the forwardmost blade insert member 128 when the wear plate/piercing tip insert 150 and blade insert members 128 are installed in their operative positions on the nose portion 136 of the upper, movable jaw 104.

[0041] Similarly, the bottom-facing side surfaces 186 are preferably configured such that the bottom-facing side surface 186 of the tip portion 158 that is in the lower, operative position is co-planar with a bottom-facing side surface (not visible or labeled) of the forwardmost blade insert member 128. Thus, in this configuration, the tip portion 158 that is in the lower, operative

position and the forward portion of the forwardmost blade insert member 128 work together or are combined to form the effective piercing tip region PT, as identified in FIGURES 3 and 4.

[0042] Alternatively, as illustrated in FIGURES 9-12, if the blade insert member 128" does not extend all the way forward to the forwardmost extent of the nose portion 136" of the movable jaw 104", it is preferable for the tip portions 158" of the wear plate/piercing tip inserts 150" to extend laterally, i.e, to have thicknesses t_w , sufficient to extend all the way across the width of the nose portion 136" of the upper, movable jaw 104". Although the entirety of the tip portions 158 " may extend laterally all the way across the width of the nose portion 136 ", it is also possible to have just an extension portion 158b" that protrudes from the main portion 158a" of the tip portion 158" that extend all the way across the width of the nose portion 136", as illustrated in FIGURES 9-12.

[0043] Like the prior art shears 900, the shears 100 according to the invention has an inner-facing surface 138 on the guide member 120 and a hardened steel wear insert 142.

[0044] During operation of the shears 100, a workpiece held between the lower, fixed jaw 102 and the upper, movable jaw 104 is cut or sheared by means of the steel blade insert members 126 and 128 as the upper, movable jaw is driven to pivot closed relative to the lower, fixed jaw 102. As the upper, movable jaw closes on the workpiece being sheared, the movable jaw is forced laterally slightly, away from the fixed blade member 116 and toward the guide member 120. As a result, the planar surface 164 of the wear plate/piercing tip insert 150 will bear against and slide along the wear insert 142.

[0045] The metal demolition shears 100 can also be used to cut and demolish generally flattened scrap metal. In that case, if the sheet of scrap metal rests on the lower, fixed jaw 102, the piercing tip portion PT of the nose portion 136 will make initial contact with the scrap metal as the shears are being operated and will pierce its way through the scrap metal workpiece. In that situation, the piercing edge 188 of the tip portion 158 that is in the operative position, along with the bottom-facing piercing edge 131, will operate to help the tip portion of the nose portion 136 pierce its way through the scrap metal workpiece. As the upper, movable jaw 104 continues to close relative to the lower, fixed jaw 102 and the tip portion TP pierces its way through the workpiece, the piercing edge 188, along with the bottom-facing piercing edge 131, will co-act with the cross member insert 146 to cut the metal workpiece in piercing fashion. Additionally, the shearing edge 190 of the tip portion 158 that is in the operative position will cooperate or co-act with the upper, inner-facing edge of the wear insert 142 to cut the flattened metal workpiece, in shearing fashion.

[0046] As a result of continued operation of the shears 100, the various operative edges and surfaces of the wear plate/piercing tip insert 150, namely, the piercing edge 188, the shearing edge 190, and the portion of the planar surface 164 that is disposed in the region of the tip portion 158 that is in the lower, operative position, will become dull, chipped, worn, or otherwise degraded in their functioning capacities. When the various edges and surfaces have become overly worn, a fresh set of piercing and shearing edges and a fresh wear surface portion of the planar surface 164 can be presented simply by removing the cap screws or plow bolts 152, rotating the wear plate/piercing tip insert 150 by 180° around its pivot axis 168, and reinstalling and securing it back to the nose portion 136 of the upper, movable jaw 104 with the cap screws or plow bolts 152.

[0047] In yet another embodiment 200 of a metal demolition shears according to the invention, as illustrated in FIGURE 13, two wear plate/shearing tip inserts 250a and 250b may be used, with one located on either side of the nose portion 236 of the movable upper jaw 204. In addition to each wear plate/shearing tip insert 250a and 250b being longitudinally symmetric, as defined above, the wear plate/shearing tip inserts 250a and 250b are "mirror image symmetric" with respect to each other. In other words, whereas the one wear plate/shearing tip insert 250a angles up and to the right from one end to the other, as viewed straight on when it is attached to the nose portion 236 of the upper, movable jaw 204, the other wear plate/shearing tip insert 250b angles up and to the left from the one end to the other, as viewed straight on when it is attached to the nose portion 236 of the upper, movable jaw 204.

[0048] The nose portion 236 is, itself, configured to receive and seat the wear plate/piercing tip inserts 250a and 250b appropriately, with a "pocket" or "cavity" 274 that extends all the way across the width of the center "keel" portion 237 of the nose portion 236 and a notch or cut-out 278 that also extends all the way across the keel portion 237. (The forward blade insert 228 does not extend all the way forward.) In this embodiment, the two wear plate/piercing tip inserts 250a and 250b are bolted together using cap screws or bolts (not shown) passing through the bosses 266 (which seat within depressions 282 on either side of the keel 237) and protruding tip portions 258. This effectively sandwiches the keel portion between the wear plate/piercing tip inserts.

[0049] As a result, of this configuration, the tip portions 258 provide the entire piercing tip function. Additionally, excellent wear protection is provided on both sides of the nose portion, and the configuration permits

indexability of the wear plate/piercing tip inserts on each side of the jaw 204. Finally, although not illustrated, the configuration of the wear plate/piercing tip inserts 250a and 250b may also be such as to permit them to be interchanged from one side of the nose portion 236 to the other.

[0050] The embodiments of the invention described herein are illustrative, and the invention is not deemed to be limited to those specific embodiments. Modifications to the described invention will, of course, occur to those having skill in the art, and such modifications to the disclosed embodiment that are within the spirit of the invention are deemed to be embraced by the following claims.

WHAT IS CLAIMED IS:

1. An indexable wear plate/piercing tip insert configured to be attached at a front, nose portion of a correspondingly configured movable jaw of a metal demolition shears, the wear plate/piercing tip insert comprising:

a metal body having a central region and two ends, and

a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said body so as to define a piercing tip that extends at least partially across the width of the front, nose portion of the movable jaw when the wear plate/piercing tip insert is attached to the movable jaw;

wherein a second side of said body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert;

wherein each said tip portion has a shearing edge on said second side of said body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the movable jaw when the wear plate/piercing tip insert is attached to the movable jaw; and

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface;

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented simultaneously

for the metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said wear plate/piercing tip insert on the movable jaw, and

wherein rotation of the wear plate/piercing tip insert between the first and second positions swaps the shearing edges of the two metal tip portions between operative and non-operative positions.

2. The wear plate/piercing tip insert of claim 1, wherein said second position is a position in which the wear plate/piercing tip insert is rotated by 180° about said pivot axis.

3. An indexable wear plate/piercing tip insert configured to be attached at a front, nose portion of a correspondingly configured movable jaw of a metal demolition shears, the wear plate/piercing tip insert comprising:

a metal body having a central region and two ends, and

a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said body so as to define a piercing tip that extends at least partially across the width of the front, nose portion of the movable jaw when the wear plate/piercing tip insert is attached to the movable jaw;

wherein a second side of said body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert;

wherein each said tip portion has a shearing edge on said second side of said body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the

width of the front, nose portion of the movable jaw when the wear plate/piercing tip insert is attached to the movable jaw; and

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface;

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented simultaneously for the metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said wear plate/piercing tip insert on the movable jaw, and

wherein the shearing edge of each tip portion is coplanar with and forms an edge of said generally planar surface.

4. An indexable wear plate/piercing tip insert configured to be attached at a front, nose portion of a correspondingly configured movable jaw of a metal demolition shears, the wear plate/piercing tip insert comprising:

a metal body having a central region and two ends;

a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said body so as to define a piercing tip that extends at least partially across the width of the front, nose portion of the movable jaw when the wear plate/piercing tip insert is attached to the movable jaw; and

at least one boss or dowel that is located between said metal tip portions and that extends laterally from said central region in the direction of the first side

of said body,

wherein a second side of said body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert;

wherein each said tip portion has a shearing edge on said second side of said body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the movable jaw when the wear plate/piercing tip insert is attached to the movable jaw; and

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface;

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented simultaneously for the metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said wear plate/piercing tip insert on the movable jaw.

5. A metal demolition shears, comprising:

a fixed jaw having a fixed blade member with a first cutting/shearing edge extending therealong and a guide member spaced from and extending in generally parallel relation to said fixed blade member;

a movable jaw with a second cutting/shearing edge extending therealong and that pivots relative to said fixed jaw; and

an indexable wear plate/piercing tip insert that is attached at a front, nose portion of said movable jaw, the wear plate/piercing tip insert comprising a metal body having a central region and two ends and a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said body so as to define an integral piercing tip that extends at least partially across the width of the front, nose portion of the movable jaw;

wherein a second side of said body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert;

wherein each said tip portion has a shearing edge on said second side of said body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the movable blade member; and

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface,

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented simultaneously for said metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said insert on said movable blade member, and

wherein rotation of the wear plate/piercing tip insert between the first and second positions swaps the shearing edges of the two metal tip portions between operative and non-operative positions.

6. The metal demolition shears of claim 5, wherein said second position is a position in which the wear plate/piercing tip insert is rotated by 180° about said pivot axis.

7. A metal demolition shears, comprising:

a fixed jaw having a fixed blade member with a first cutting/shearing edge extending therealong and a guide member spaced from and extending in generally parallel relation to said fixed blade member;

a movable jaw with a second cutting/shearing edge extending therealong and that pivots relative to said fixed jaw; and

an indexable wear plate/piercing tip insert that is attached at a front, nose portion of said movable jaw, the wear plate/piercing tip insert comprising a metal body having a central region and two ends and a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said body so as to define an integral piercing tip that extends at least partially across the width of the front, nose portion of the movable jaw,

wherein a second side of said body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert,

wherein each said tip portion has a shearing edge on said second side of said body and a piercing edge disposed at an angle relative to and intersecting

with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the movable blade member,

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface,

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented simultaneously for said metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said insert on said movable blade member, and

wherein the front, nose portion of the movable jaw member has a pocket or cavity extending laterally inwardly from a surface thereof into which the tip portions of the wear plate/piercing tip insert each fit, one of the tip portions being fitted in said pocket or cavity when positioned in a non-operative position.

8. The metal demolition shears of claim 7, wherein the pocket or cavity has contours that match surface contours of the tip portions.

9. The metal demolition shears of claim 5, wherein the front, nose portion of the movable jaw member has a notch formed in an underside thereof, the notch having surface contours that match surface contours of each of the tip portions, wherein one of the tip portions that is positioned in the operative position engages with said notch.

10. A metal demolition shears, comprising:

a fixed jaw having a fixed blade member with a first cutting/shearing edge extending therealong and a guide member spaced from and extending in generally parallel relation to said fixed blade member;

a movable jaw with a second cutting/shearing edge extending therealong and that pivots relative to said fixed jaw; and

an indexable wear plate/piercing tip insert that is attached at a front, nose portion of said movable jaw, the wear plate/piercing tip insert comprising a metal body having a central region and two ends and a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said body so as to define an integral piercing tip that extends at least partially across the width of the front, nose portion of the movable jaw,

wherein a second side of said body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert,

wherein each said tip portion has a shearing edge on said second side of said body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the movable blade member,

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface;

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented simultaneously for said metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said insert on said movable blade member, and

wherein said wear plate/piercing tip insert further comprises at least one boss or dowel that is located between said metal tip portions and that extends laterally from said central region in the direction of the first side of said body and wherein the front, nose portion of the movable jaw has a depression extending laterally inwardly from a surface thereof that matches surface contours of said at least one boss or dowel, said at least one boss or dowel fitting within said depression.

11. The metal demolition shears of claim 5, wherein the second cutting/shearing edge is provided by at least one blade insert member.

12. A metal demolition shears, comprising:

a fixed jaw having a fixed blade member with a first cutting/shearing edge extending therealong and a guide member spaced from and extending in generally parallel relation to said fixed blade member;

a movable jaw with a second cutting/shearing edge extending therealong and that pivots relative to said fixed jaw; and

an indexable wear plate/piercing tip insert that is attached at a front, nose portion of said movable jaw, the wear plate/piercing tip insert comprising a metal body having a central region and two ends and a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a

surface of said central region in the direction of a first side of said body so as to define an integral piercing tip that extends at least partially across the width of the front, nose portion of the movable jaw,

wherein a second side of said body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert,

wherein each said tip portion has a shearing edge on said second side of said body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the movable blade member,

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface,

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented simultaneously for said metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said insert on said movable blade member,

wherein the second cutting/shearing edge is provided by at least one blade insert member, and

wherein the blade insert member extends all the way to a forwardmost portion of the front, nose portion of the movable jaw and wherein an inner-facing surface of one of the tip portions that is in an operative position engages with an inner-facing surface of the blade insert.

13. The metal demolition shears of claim 12, wherein forward-facing surfaces of the tip portion in the operative position and the blade insert are co-planar and bottom-facing surfaces of the tip portion in the operative position and the blade insert are co-planar such that a forward portion of the blade insert and a forward, lower portion of the tip portion in the operative position together define a piercing tip portion of the movable jaw.

14. A jaw member for use in a metal demolition shears, said jaw member comprising:

a jaw body with a cutting/shearing edge extending therealong; and

an indexable wear plate/piercing tip insert that is attached at a front, nose portion of said jaw body, the wear plate/piercing tip insert comprising a metal insert body having a central region and two ends and a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said insert body so as to define an integral piercing tip that extends at least partially across the width of the front, nose portion of the jaw body;

wherein a second side of said insert body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert;

wherein each said tip portion has a shearing edge on said second side of said insert body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the jaw body; and

wherein the geometric configuration of said wear plate/piercing tip insert

is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface,

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented for the metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said insert body on said movable blade member, and

wherein rotation of the wear plate/piercing tip insert between the first and second positions swaps the shearing edges of the two metal tip portions between operative and non-operative positions.

15. The jaw member of claim 14, wherein said second position is a position in which the wear plate/piercing tip insert is rotated by 180° about said pivot axis.

16. A jaw member for use in a metal demolition shears, said jaw member comprising:

a jaw body with a cutting/shearing edge extending therealong; and

an indexable wear plate/piercing tip insert that is attached at a front, nose portion of said jaw body, the wear plate/piercing tip insert comprising a metal insert body having a central region and two ends and a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said insert body so as to define an integral piercing tip that extends at least partially across the width

of the front, nose portion of the jaw body,

wherein a second side of said insert body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert;

wherein each said tip portion has a shearing edge on said second side of said insert body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the jaw body,

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface,

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented for the metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said insert body on said movable blade member, and

wherein the front, nose portion of the jaw body has a pocket or cavity extending laterally inwardly from a surface thereof into which the tip portions of the wear plate/piercing tip insert each fit, one of the tip portions being fitted in said pocket or cavity when positioned in a non-operative position.

17. The jaw member of claim 16, wherein the pocket or cavity has contours that match surface contours of the tip portions.

18. A jaw member for use in a metal demolition shears, said jaw member comprising:

a jaw body with a cutting/shearing edge extending therealong; and

an indexable wear plate/piercing tip insert that is attached at a front, nose portion of said jaw body, the wear plate/piercing tip insert comprising a metal insert body having a central region and two ends and a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said insert body so as to define an integral piercing tip that extends at least partially across the width of the front, nose portion of the jaw body,

wherein a second side of said insert body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert,

wherein each said tip portion has a shearing edge on said second side of said insert body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the jaw body,

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface,

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented for the metal demolition shear by rotating said wear plate/piercing tip insert about said pivot

axis from said first position to said second position and reseating said insert body on said movable blade member, and

wherein the front, nose portion of the jaw member has a notch formed in an underside thereof, the notch having surface contours that match surface contours of the tip portions, wherein one of the tip portions that is positioned in an operative position engages with said notch.

19. A jaw member for use in a metal demolition shears, said jaw member comprising:

a jaw body with a cutting/shearing edge extending therealong; and

an indexable wear plate/piercing tip insert that is attached at a front, nose portion of said jaw body, the wear plate/piercing tip insert comprising a metal insert body having a central region and two ends and a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said insert body so as to define an integral piercing tip that extends at least partially across the width of the front, nose portion of the jaw body,

wherein a second side of said insert body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert;

wherein each said tip portion has a shearing edge on said second side of said insert body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the jaw body,

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second

position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface;

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented for the metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said insert body on said movable blade member, and

wherein said wear plate/piercing tip insert further comprises a boss that is located between said metal tip portions and that extends laterally from said central region in the direction of the first side of said body and wherein the front, nose portion of said jaw member has a depression extending laterally inwardly from a surface thereof that matches surface contours of said boss, said boss fitting within said depression.

20. A jaw member for use in a metal demolition shears, said jaw member comprising:

a jaw body with a cutting/shearing edge extending therealong; and

an indexable wear plate/piercing tip insert that is attached at a front, nose portion of said jaw body, the wear plate/piercing tip insert comprising a metal insert body having a central region and two ends and a metal tip portion disposed at each of said two ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said insert body so as to define an integral piercing tip that extends at least partially across the width of the front, nose portion of the jaw body,

wherein a second side of said insert body that is opposite to said first side

has a generally planar surface to define a wear surface of said wear plate/piercing tip insert,

wherein each said tip portion has a shearing edge on said second side of said insert body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said piercing edge extending at least partially across the width of the front, nose portion of the jaw body,

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface,

wherein a non-worn or less worn portion of said wear surface and non-worn or less worn shearing and piercing edges can be presented for the metal demolition shear by rotating said wear plate/piercing tip insert about said pivot axis from said first position to said second position and reseating said insert body on said movable blade member, and

wherein the cutting/shearing edge is provided by at least one blade insert member.

21. The jaw member of claim 20, wherein the blade insert member extends all the way to a forwardmost portion of the front, nose portion of the jaw member and wherein an inner-facing surface of one of the tip portions that is in an operative position engages with an inner-facing surface of the blade insert.

22. The jaw member of claim 21, wherein forward-facing surfaces of the tip portion in the operative position and the blade insert are co-planar and bottom-

facing surfaces of the tip portion in the operative position and the blade insert are co-planar such that a forward portion of the blade insert and a forward, lower portion of the tip portion in the operative position together define a piercing tip portion of the jaw member.

23-39. (Canceled).

40. The wear plate/piercing tip insert of claim 4, wherein the at least one boss or dowel comprises a first boss or dowel that is disposed at the pivot axis.

41. The wear plate/piercing tip insert of claim 4, wherein the at least one boss or dowel comprises a first boss or dowel and a second boss or dowel, wherein the first boss or dowel and the second boss or dowel are spaced equal distances away from the pivot axis.

42. An indexable wear plate/piercing tip insert configured to be attached at a front, nose portion of a correspondingly configured jaw of a metal demolition shears, the wear plate/piercing tip insert comprising:

a metal body having a central region and two longitudinal ends;

a metal tip portion disposed at each of said two longitudinal ends, each said tip portion protruding laterally with respect to a surface of said central region in the direction of a first side of said body so as to define a piercing tip that extends at least partially across the width of the front, nose portion of the jaw when the wear plate/piercing tip insert is attached to the jaw; and

at least one circular boss that is located between said metal tip portions and that extends laterally from said central region in the direction of the first side

of said metal body,

wherein a second side of said body that is opposite to said first side has a generally planar surface to define a wear surface of said wear plate/piercing tip insert;

wherein each said tip portion has a shearing edge on said second side of said body and a piercing edge disposed at an angle relative to and intersecting with said shearing edge, said shearing edge of each tip portion being coplanar with said generally planar surface and forming an edge of said generally planar surface, said piercing edge extending at least partially across the width of the front, nose portion of the jaw when the wear plate/piercing tip insert is attached to the jaw; and

wherein the geometric configuration of said wear plate/piercing tip insert is essentially the same in a first position and a second position, said second position being a position in which said wear plate/piercing tip insert is rotated by 180° about a pivot axis passing centrally through said wear plate/piercing tip insert, normal to said generally planar surface.

43. The wear plate/piercing tip insert of claim 42, wherein:
the at least one circular boss comprises a first boss; and
the pivot axis passing centrally through said wear plate/piercing tip insert passes through a center of the first boss.

44. The wear plate/piercing tip insert of claim 43, further comprising a bore extending laterally through each of the tip portions.

45. The wear plate/piercing tip insert of claim 44, wherein:
each metal tip portion includes a contoured surface that faces the
contoured surface of the other metal tip portion; and
the contoured surfaces are bowed toward each other.

46. The wear plate/piercing tip insert of claim 45, wherein:
the central region of the metal body further includes a generally planar
surface from which the first boss extends;
the generally planar surface of the central region is generally parallel to
the generally planar surface of the second side of the body;
the central region includes first and second generally planar edge surfaces
that extend from the generally planar surface of the central region to the generally
planar surface of the second side of the body;
a first notch extends into the central region from the first generally planar
edge surface; and
a second notch extends into the central region from the second generally
planar edge surface.

47. The wear plate/piercing tip insert of claim 46, wherein the generally
planar surface of the central region intersects the contoured surfaces of the metal
tip portions at right angles.

48. The wear plate/piercing tip insert of claim 47, further comprising a
bore extending laterally through the first boss.

49. The wear plate/piercing tip insert of claim 42, wherein the at least one circular boss comprises a plurality of circular bosses that are arranged symmetrically with respect to the pivot axis passing centrally through said wear plate/piercing tip insert.

50. (Canceled)

51. The wear plate/piercing tip insert of claim 1, wherein said two ends of said metal body comprise two longitudinal ends.

52. (Canceled)

53. The metal demolition shears of claim 5, wherein said two ends of said metal body comprise two longitudinal ends.

54. (Canceled)

55. The jaw member of claim 14, wherein said two ends of said metal body comprise two longitudinal ends.

56. The metal demolition shears of claim 5, wherein said pivot axis is parallel to a pivotal axis formed between the movable and fixed jaws.

57. The metal demolition shears of claim 5, wherein the generally planar surface is perpendicular to a pivotal axis formed between the movable and fixed jaws.

ABSTRACT

The invention features an indexable wear plate/piercing tip insert that is configured to be removably and repositionably attached to the front, nose portion of the upper, movable jaw of a metal demolition shears. The insert functions as both a wear plate and a piercing tip and is indexable in that a non-worn or less worn portion of the wear surface of the wear plate portion of the insert, and non-worn shearing and piercing edges of the piercing tip portion of the insert, can be presented simultaneously simply by rotating the insert 180° and reattaching it to the nose portion of the upper, movable jaw of a metal demolition shears.

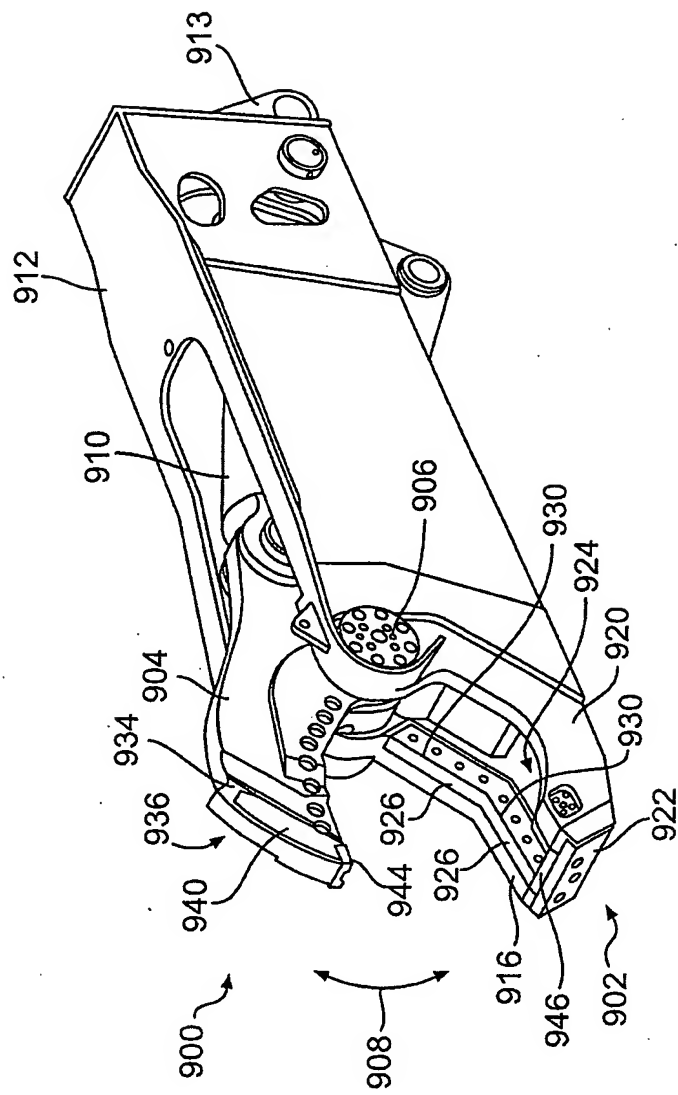


FIG. 1
PRIOR ART

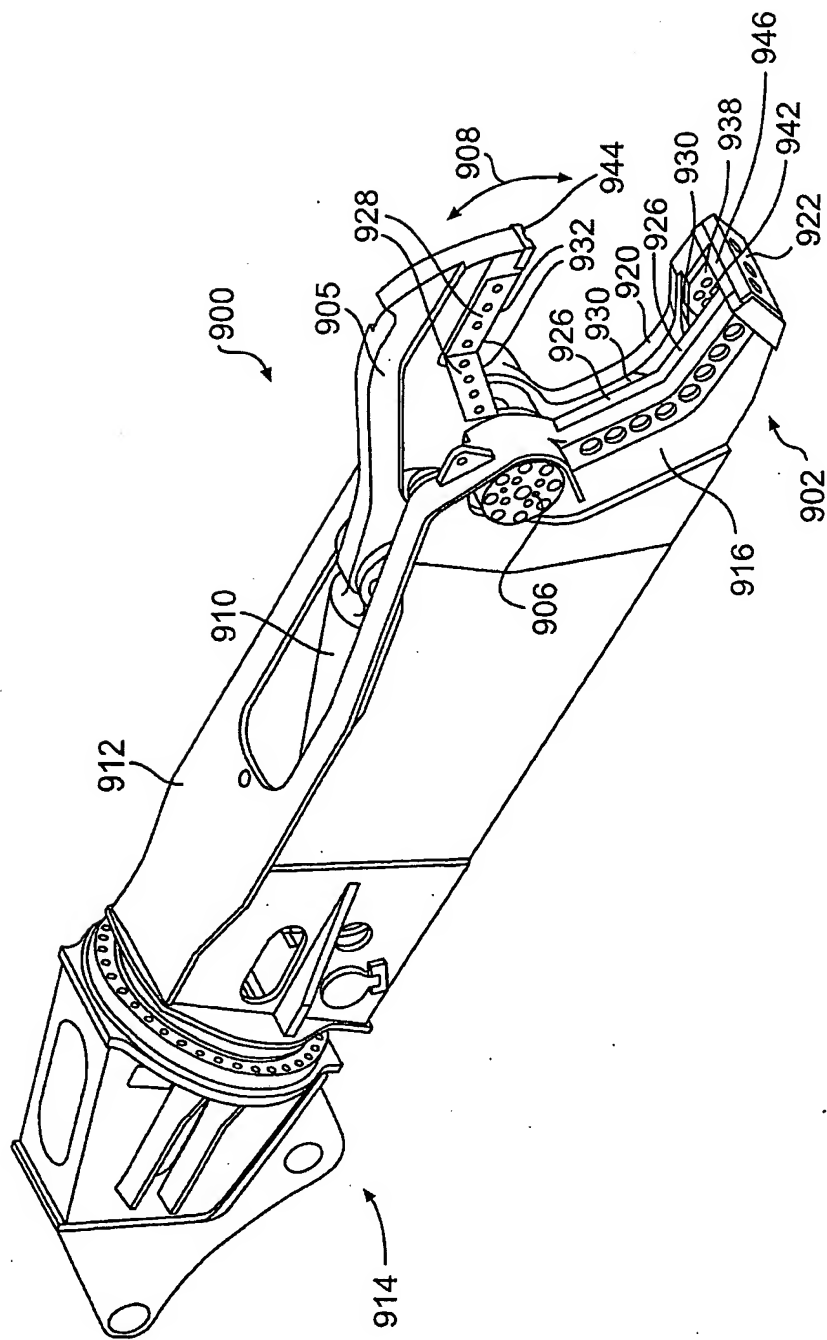


FIG. 2
PRIOR ART

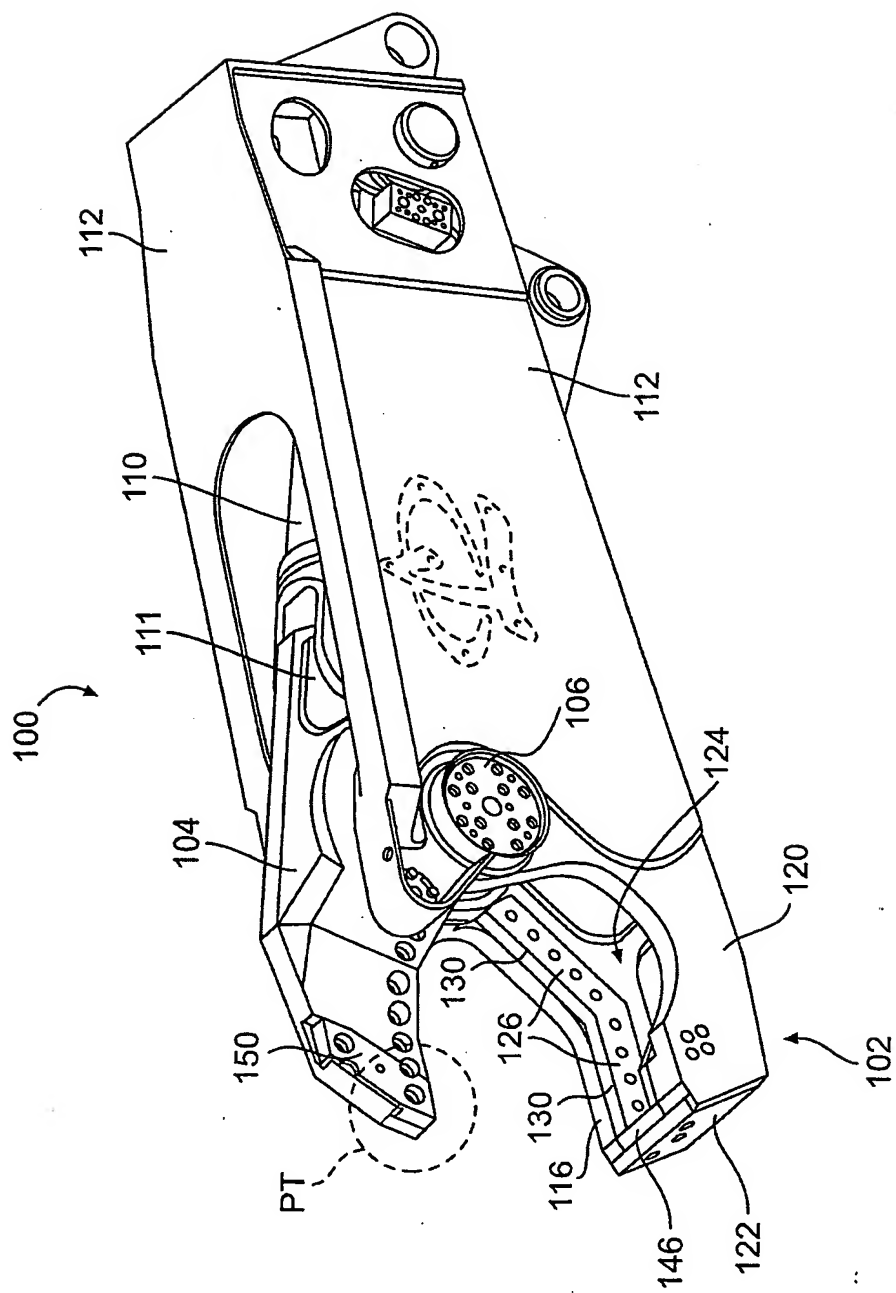


FIG. 3

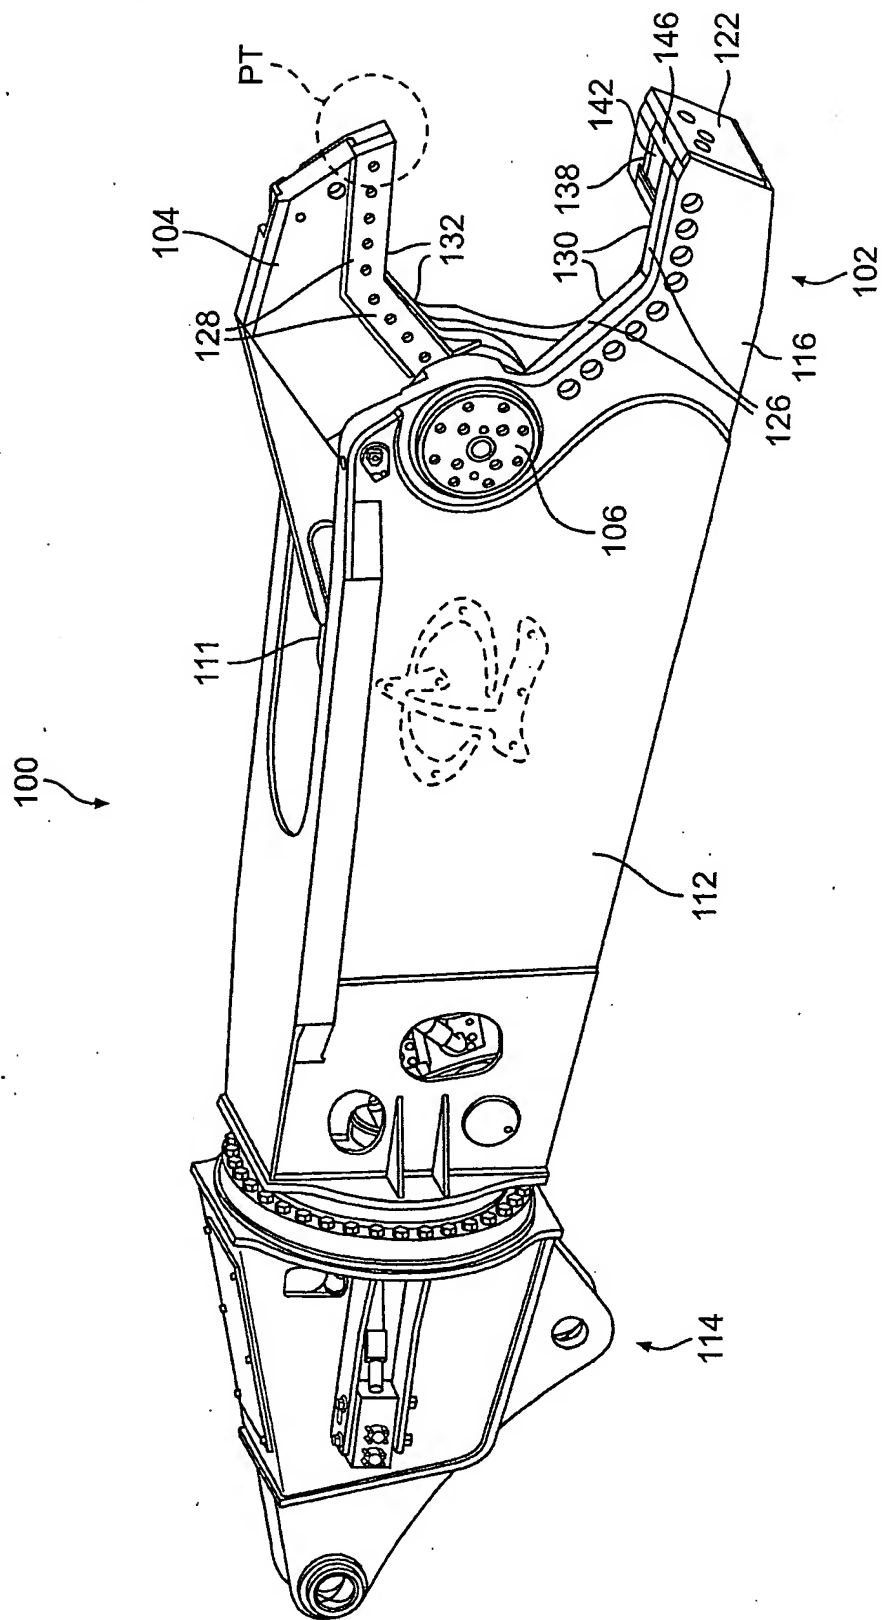


FIG. 4

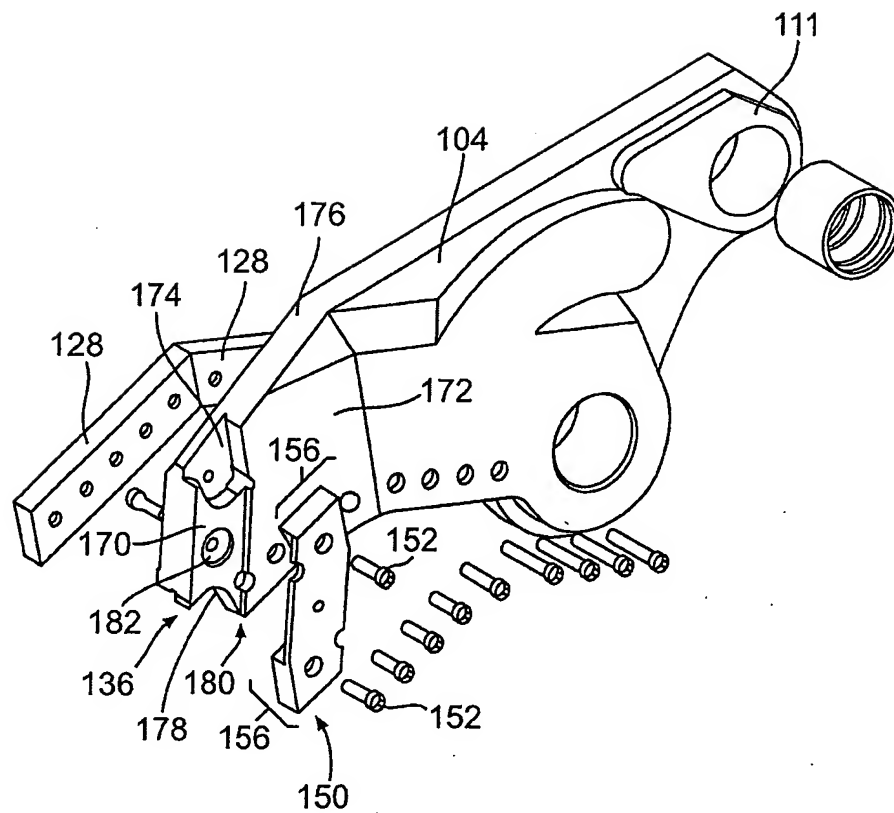


FIG. 5

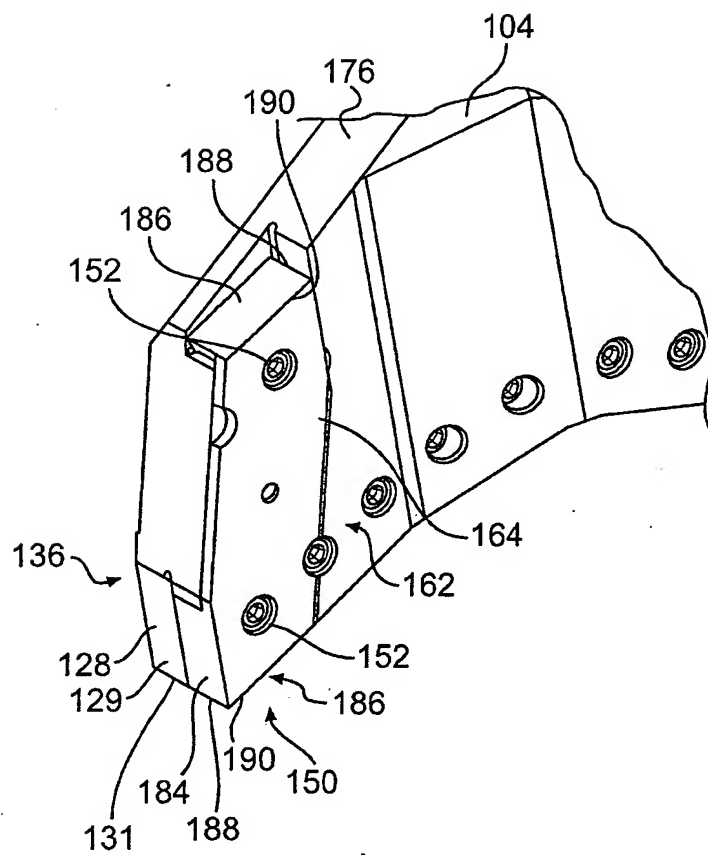


FIG. 6

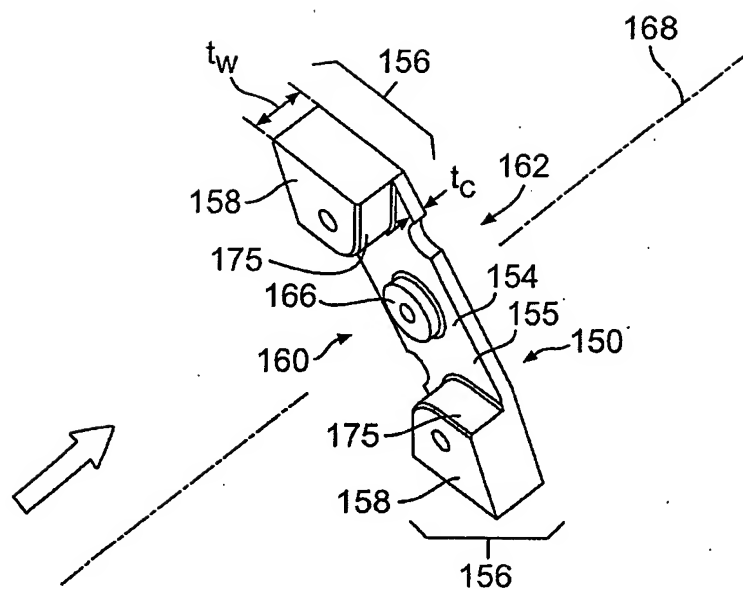


FIG. 7

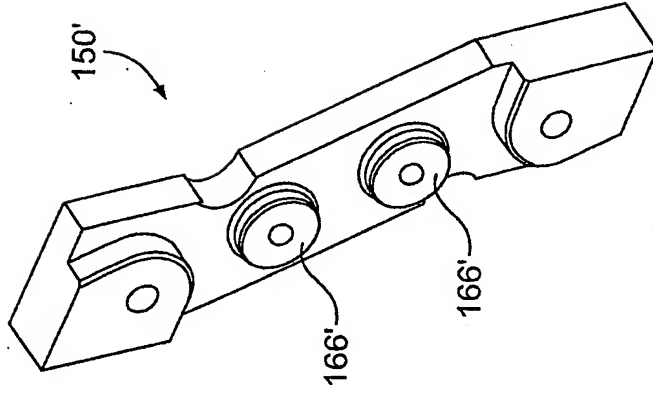


FIG. 8a

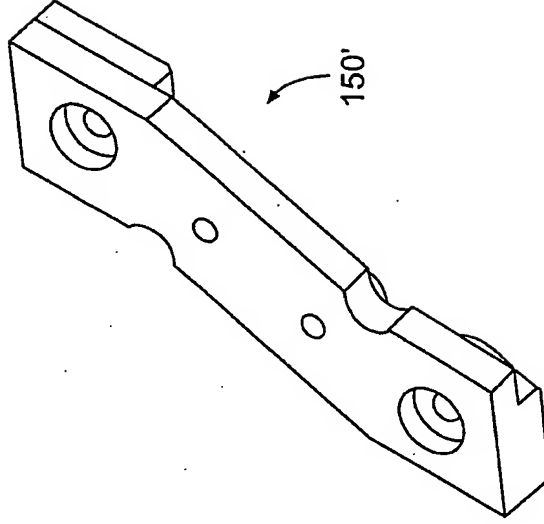


FIG. 8b

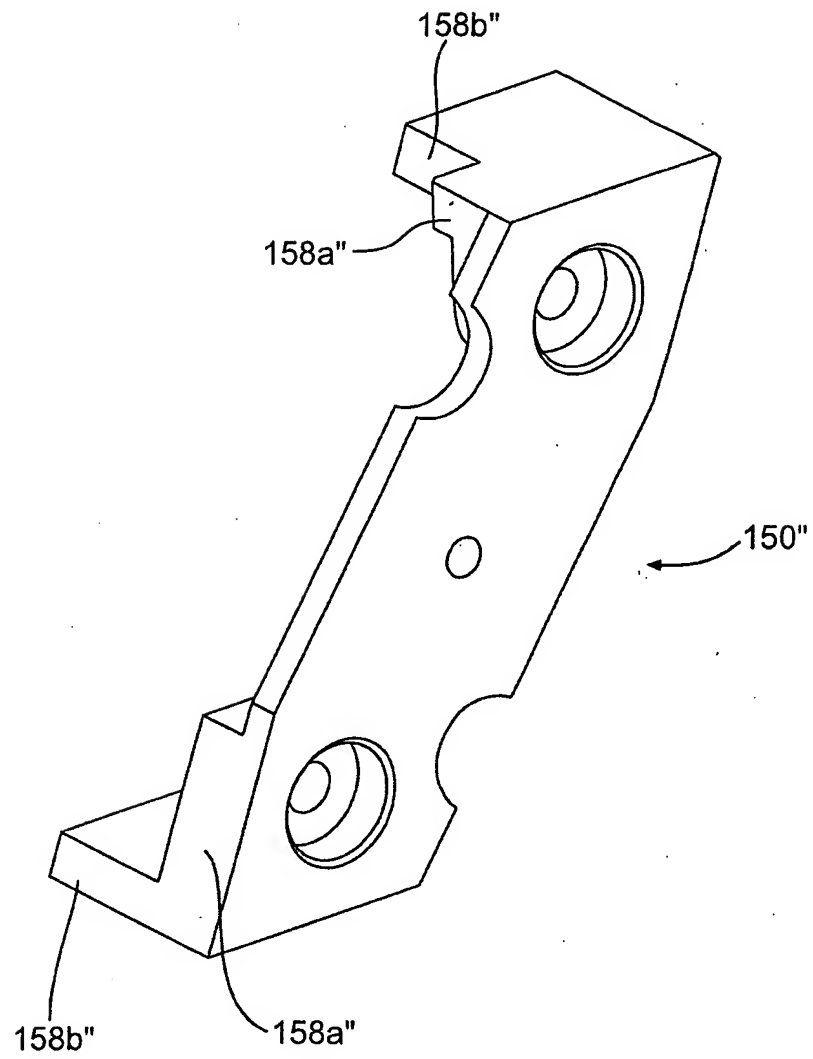


FIG. 9

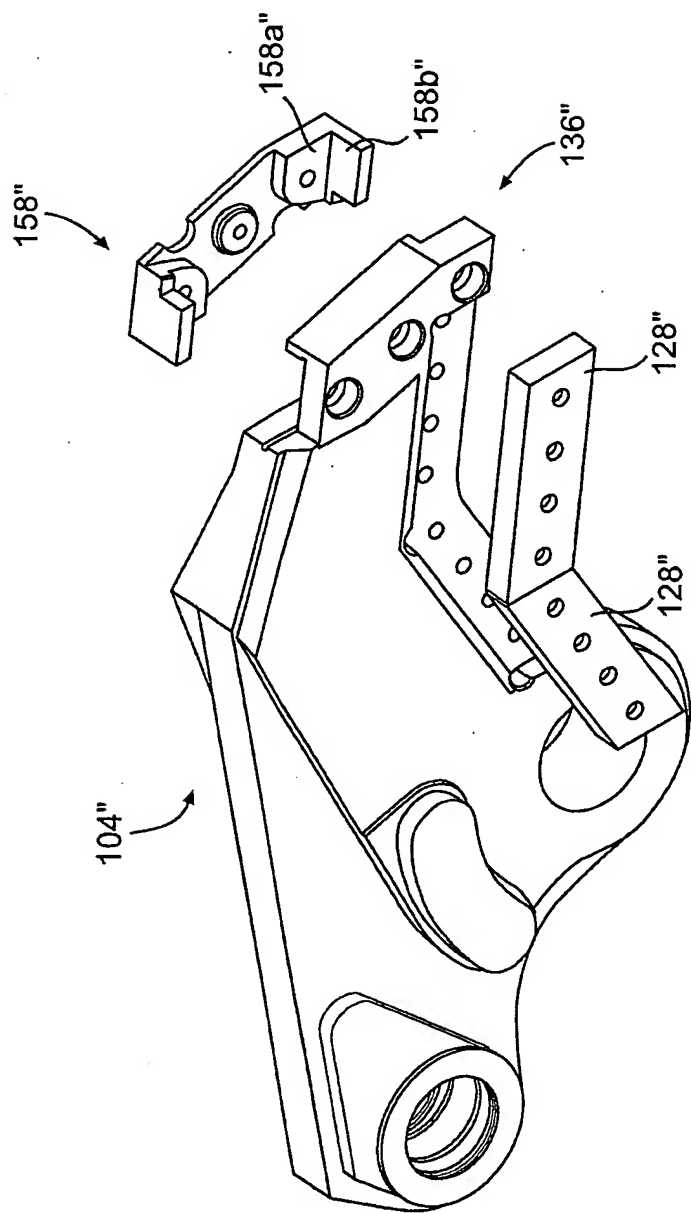


FIG. 10

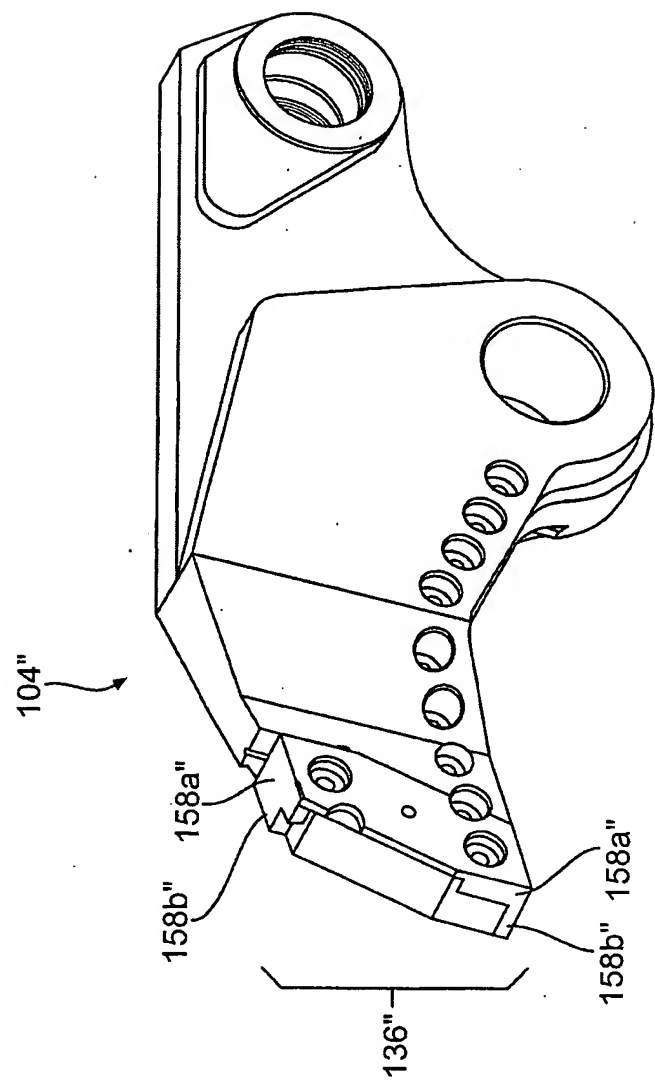


FIG. 11

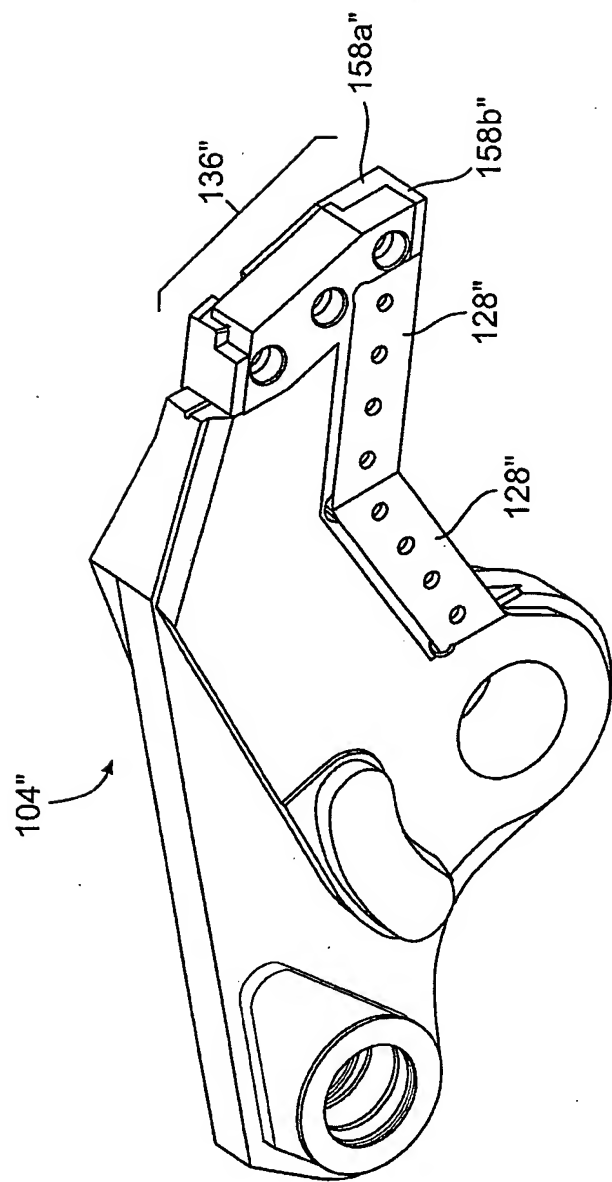


FIG. 12

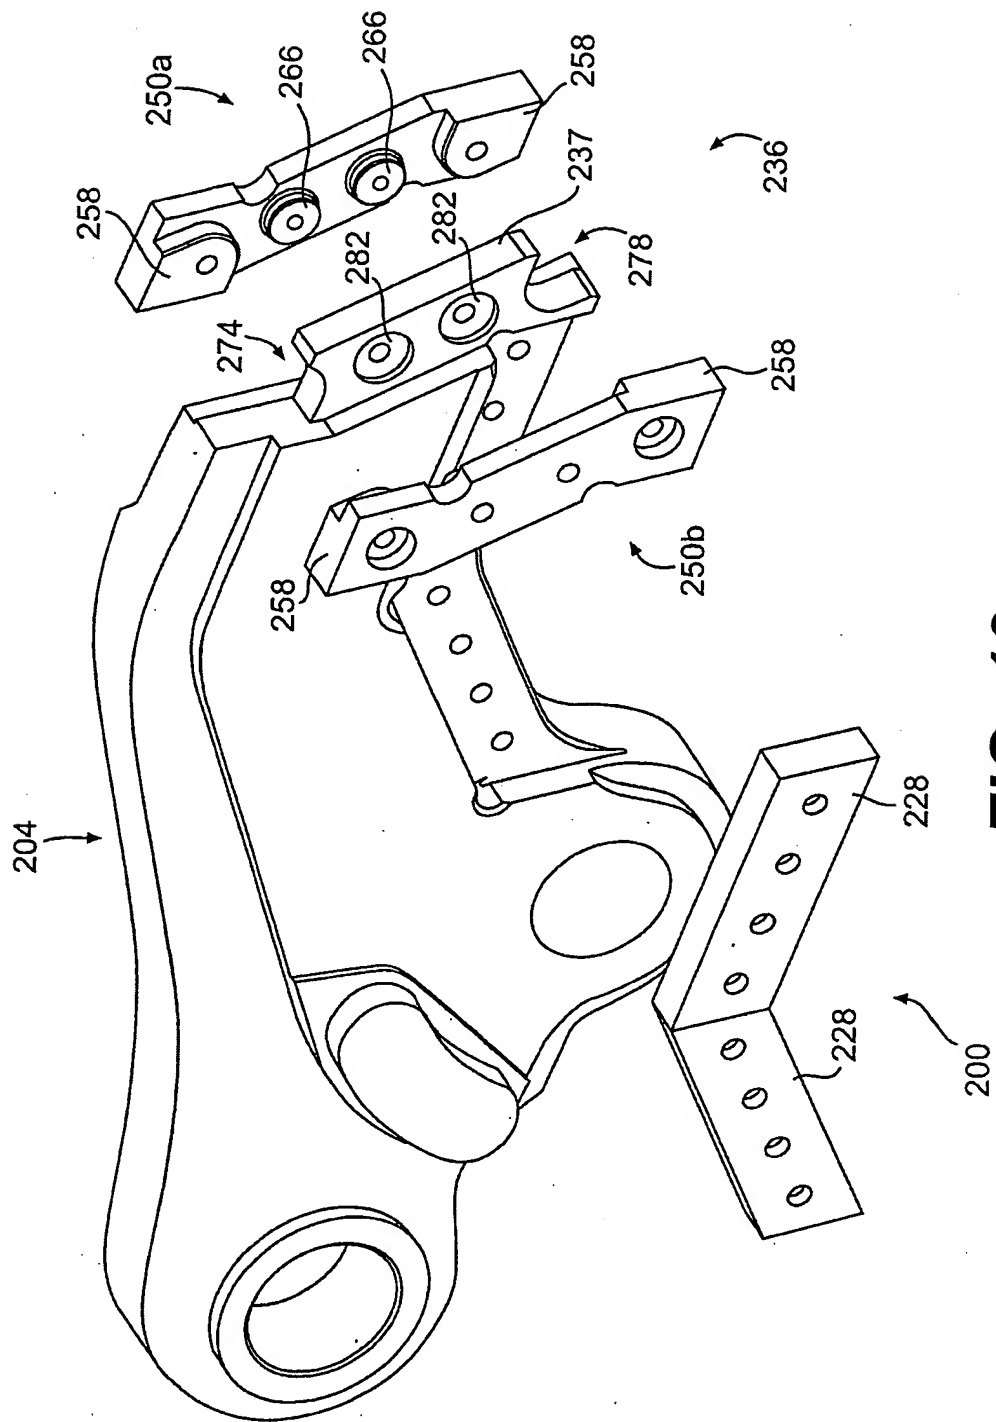


FIG. 13

Electronic Patent Application Fee Transmittal

Application Number:	10697554			
Filing Date:	31-Oct-2003			
Title of Invention:	Metal demolition shears with indexable, integrated wear plate/piercing tip			
First Named Inventor/Applicant Name:	Karl Johnson			
Filer:	Benjamin Lee Kiersz/Joyce Hill			
Attorney Docket Number:	081776-0306363			
Filed as Large Entity				
Utility	Filing Fees			
Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Basic Filing:				
Pages:				
Claims:				
Miscellaneous-Filing:				
Petition:				
Patent-Appeals-and-Interference:				
Post-Allowance-and-Post-Issuance:				
Publ. Fee- early, voluntary, or normal	1504	1	300	300
Extension-of-Time:				

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Miscellaneous:				
Request for voluntary publication or rep	1803	1	130	130
Total in USD (\$)				430

Electronic Acknowledgement Receipt

EFS ID:	3609805
Application Number:	10697554
International Application Number:	
Confirmation Number:	8401
Title of Invention:	Metal demolition shears with indexable, integrated wear plate/piercing tip
First Named Inventor/Applicant Name:	Karl Johnson
Customer Number:	909
Filer:	Benjamin Lee Kiersz/Joyce Hill
Filer Authorized By:	Benjamin Lee Kiersz
Attorney Docket Number:	081776-0306363
Receipt Date:	14-JUL-2008
Filing Date:	31-OCT-2003
Time Stamp:	14:07:54
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$ 430
RAM confirmation Number	7830
Deposit Account	033975
Authorized User	

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

Charge any Additional Fees required under 37 C.F.R. Section 1.19 (Document supply fees)

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes) /Message Digest	Multi Part /.zip	Pages (if appl.)
1	Request/Corrected Patent Application Publications	republicationrequest1.pdf	30814	no	1
			746242878af9714320145ca52aa51774bbb019c2		
Warnings:					
Information:					
2	Application Data Sheet	republicationapplicationdatasheet.pdf	199599	no	4
			a13433c4a83eed55b1aaf340413b9a73e7af2042		
Warnings:					
Information:					
This is not an USPTO supplied ADS fillable form					
3		applicationtoberepublished.pdf	1728040	yes	52
			36846630accb3ac6da293fa85f61dfb2cc38b5bd		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	17	
	Claims		18	38	
	Abstract		39	39	
	Drawings-only black and white line drawings		40	52	
Warnings:					
Information:					
4	Fee Worksheet (PTO-06)	fee-info.pdf	8362	no	2
			0fbbc588edf61618447236348bb138ee54e0cc34		
Warnings:					
Information:					
Total Files Size (in bytes):			1966815		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.